

# 4400 SERIES LEVEL GAUGE



## CLOSE-MOUNT LEVEL GAUGE


### APPLICATION:

The KENCO close-mount level gauge is ideally suited for applications in which the level gauge must be mounted with a minimum of protrusion from the tank. Typical applications include offshore or corrosive atmospheres, packaged hydraulic equipment, steel mill pumps, surge tanks, radiator fluid levels.


The design of these gauges affords easy installation. Simply install the male thread adapter into the tank connection and then slide the gauge housing over these adapters and bolt gauge into place. The glass is protected from breakage by the gauge housing.

### FEATURES

- Redline glass for easy observation of fluid level
- Metal frame on three sides protects glass
- Large ports provide quick level response
- Easy installation-no pipe unions and/or threaded nipples required
- 1/4" or 1/2" connections mount directly into FNPT process connection



# 4400 SERIES LEVEL GAUGE

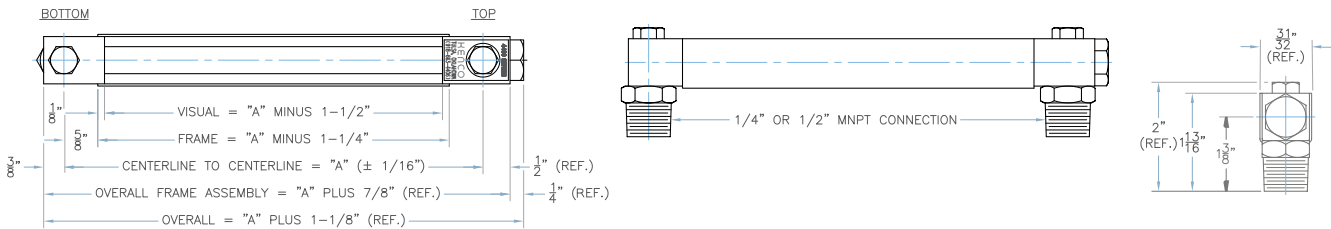

## ORDERING SYSTEM 4400 Series Level Gauge

COMPANY: \_\_\_\_\_ CITY: \_\_\_\_\_ STATE: \_\_\_\_\_ ZIP: \_\_\_\_\_

REQUESTED BY: \_\_\_\_\_ PHONE: \_\_\_\_\_ FAX: \_\_\_\_\_

ADDRESS: \_\_\_\_\_ EMAIL : \_\_\_\_\_

**Process Connections**  
44M25=1/4" MNPT  
44M50=1/2" MNPT

**Center to Center Dimension (inches)**

**Material of Construction**  
B=Nickel Plated Brass

**Seal Material**  
V=Fluorocarbon  
A=Aflas  
B=Buna-N  
E=Ethylene Propylene

**Sight Tube Options**  
RL=1/2" O.D. Redline Glass

**Maximum Working Pressure (PSIG)**

**Maximum Operating Temperature (°F)**

**Steam**  
NS=Non-Steam Application